

Level Alert Panel

Beacon only. Sounder Only.
Combined beacon / sounder.

The Alarm Alert Panel extends an alarm indication beyond the main control panel, helping building users to respond quickly when a leak or level alarm occurs.



A Clear Warning Wherever it's Needed.

102 dB
sounder output

SUPER BRIGHT
flashing LED beacon

12V DC
powered by the alarm panel

AT A GLANCE

- ✓ Super-bright flashing amber LED
- ✓ 102dB audible alarm at 1m
- ✓ Powered by 12VDC from main alarm panel
- ✓ Install up to 100m from main alarm panel
- ✓ Never miss an alarm
- ✓ Ideal for positioning outside restricted access rooms

Beacon Only

MODEL: ETA-BEA-01-00-12-R1

Sounder Only

MODEL: ETA-SOU-01-00-12-R1

Beacon/Sounder




MODEL: ETA-B/S-01-00-12-R1



APPLICATIONS & OPERATION

Designed to alert when it matters most.

Installing an alarm alert panel is particularly valuable where the main alarm panel is installed in a noisy or restricted area such as a plant room, comms room or other area where it may be difficult to hear, see or access.



SIMPLE SYSTEM EXTENSION

Power is supplied from the main alarm panel and only a two-core connection cable is required. When the originating alarm resets after the leak condition has been stopped, the Alarm Alert Panel resets automatically.

Choose the right alert panel

CONFIGURATION	INDICATION	BEST SUITED TO
Sounder/beacon combined	102 dB audible alarm and super-bright flashing LED	General applications where both visual and audible warning are required.
Beacon only	Super bright flashing LED	Locations where a loud audible alarm would be a nuisance.
Sounder only	102dB audible alarm at 1m	Useful for areas where a beacon may not be seen and a loud audible warning will be heard.

Key benefits

- Provides a prominent local or remote alarm indication.
- Helps prevent an alarm being missed when the main panel is out of sight or earshot.
- Ideal for positioning outside restricted-access rooms.
- Powered from the main alarm panel—no separate local power supply required.
- Surface-mounted enclosure for straightforward installation.

DESIGN SUPPORT


Not sure which alarm alert panel you need? Envirotech Alarms can help you configure the right product for your application.

TYPICAL ENVIRONMENTS


Designed for real building environments

Use the Alarm Alert Panel wherever a secondary warning will improve alarm visibility / audibility.

Typical locations include:

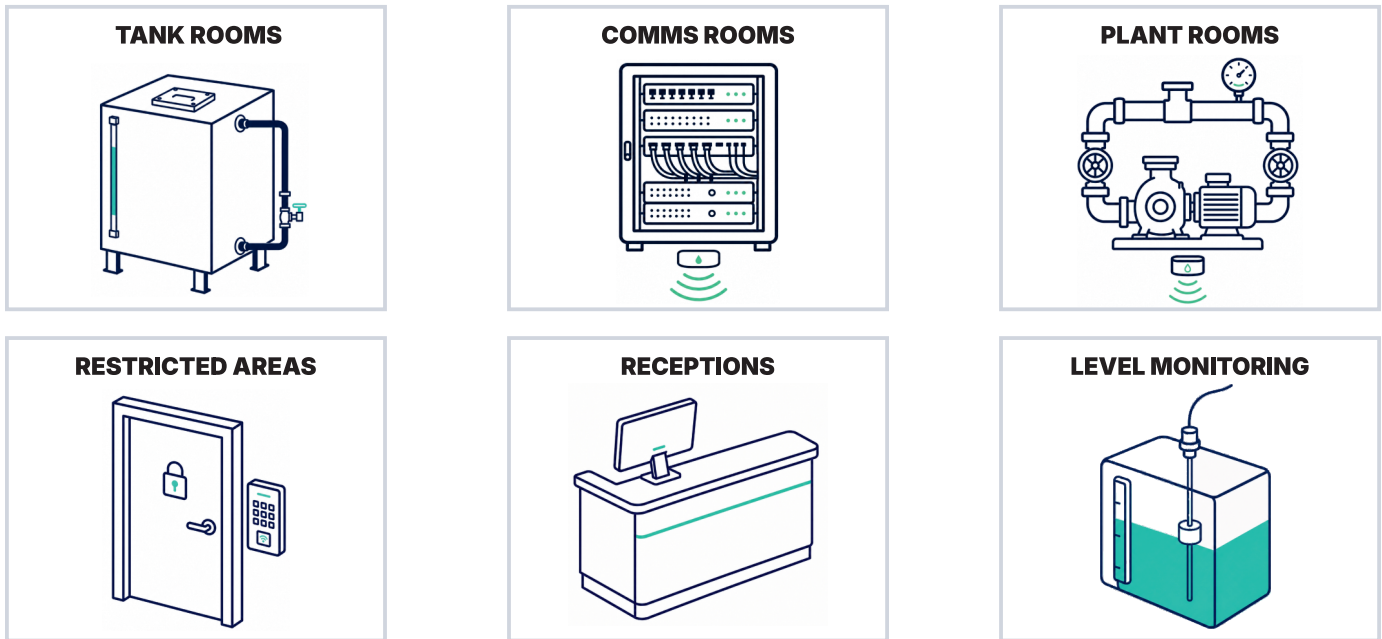

Typical connection arrangement

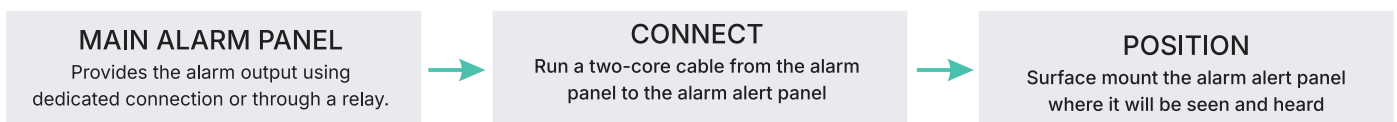

Compatible Envirotech Alarms panels

Leakstopper Range	Connected through common relay or individual zone relays
Leakstop	Dedicated 12VDC connection (2 way terminal)
Level Alarm	Dedicated 12VDC connection (2 way terminal)
Heat Hunter Range	Connected through relay using 12VDC supply in alarm panel
Leak Hunter Range	Connected through relay using 12VDC supply in alarm panel
SMS Text Dialler	Connected through relay using 12VDC supply in alarm panel



TECHNICAL SPECIFICATION

Essential information for specifying your alarm alert panel

Everything you need to know to help specify the alarm alert panel for your project.

Supply Voltage	12VDC (SELV)
Current	50mA
Panel dimensions	156 x 114 x 80mm
Mounting	Surface mount
Enclosure rating	IP55 (before cable entry)
Operating temperature	-18 to 55°C
Connection Cable	2 core (conductor depends on length from alarm panel).
Compatible with	All Envirotech Alarms panels

ORDERING DETAILS

Product name
Beacon
Sounder
Beacon/Sounder


Model number
MODEL: ETA-BEA-01-00-12-R1
MODEL: ETA-SOU-01-00-12-R1
MODEL: ETA-B/S-01-00-12-R1

Warrenty
12 Months



Connection cable size calculator

12 VDC conductor size for a 50 mA load - Minimum calculated copper conductor size for 10–100m one-way cable runs, based on a maximum 5% voltage drop.

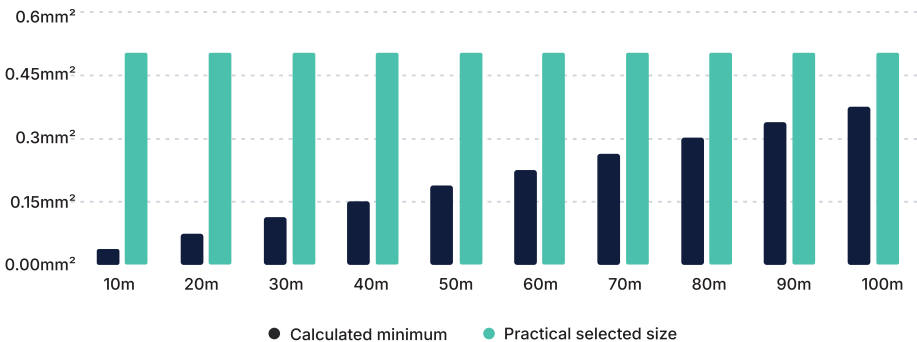

Water Leak Detection Made Simple.

Free system design and product selection support

DOCUMENT CONTROL

Brochure ref: Alarm Alert Product Info
Revision: V1.0
Date: 07/26